



# DW-MW-T Series Halogen Moisture Analyzer

## Features


1. 5 inch touch screen/CH and EN switch
2. Highlight halogen lamp/HBM sensor
3. Aluminum shell/Stainless steel chamber
4. Real-time dynamic curve/Date and Time
5. Temperature/Time set
6. The percentage of moisture content/dry residual
7. Store historical set
8. OntiomAluminum box/Printer/Grinder/USB

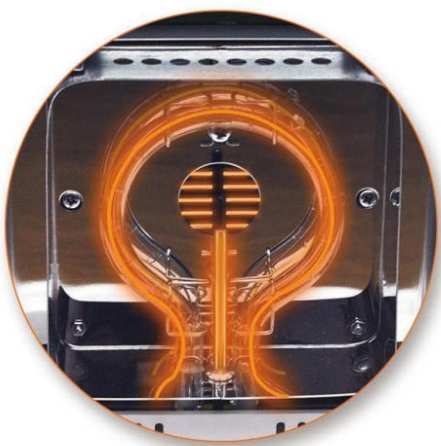

Ring halogen heating lamp  
Double stainless steel heated cabin

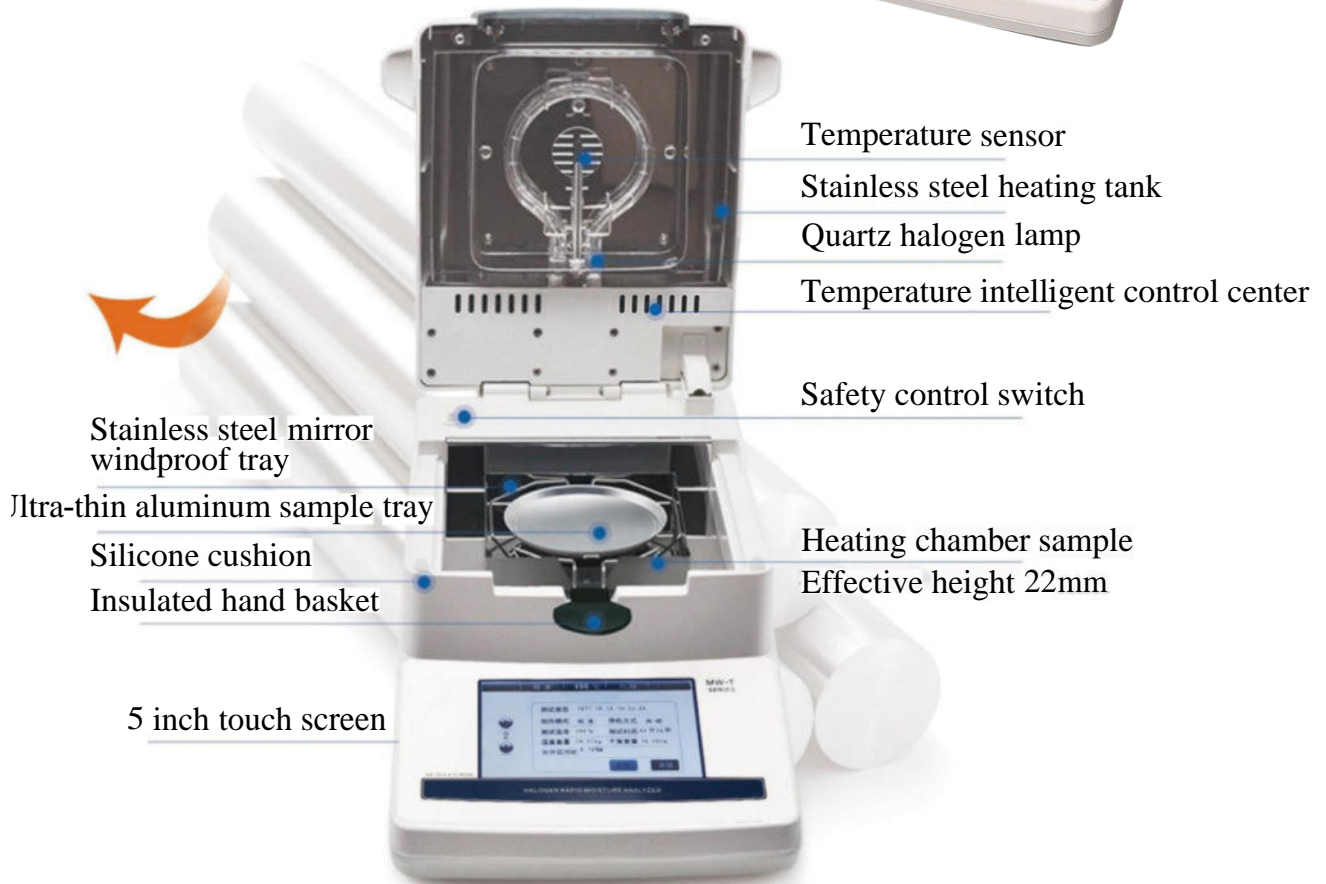


## Application



### Moisture measurement report

ModehDW-100MW-T  
Heating mode:Standard  
Stop mode: Automatic  
Heating temperature:130°C  
Heating time: 4 min 5 secs  
Wet weight:3.210g  
Dry weight:2.815g  
Moisture content:12.21%M  
-xxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxxx

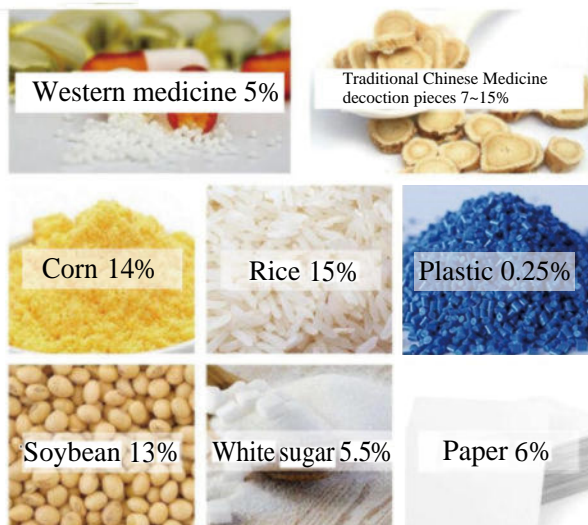

## Specifications

<b>Model</b>	<b>DW-100MW-T</b>
<b>Capacity</b>	<b>110g</b>
<b>Readability</b>	<b>0.001g</b>
<b>Operating Temp</b>	<b>5°C-35°C</b>
<b>Display</b>	<b>5 inch touch panel</b>
<b>Calibration</b>	<b>External Calibration</b>
<b>Interface</b>	<b>RS232 (standard) / USB (optional)</b>
<b>Pan Size</b>	<b>Φ90mm</b>
<b>Packing Size</b>	<b>490x350x360mm</b>
<b>Gross Weight</b>	<b>7.5kg</b>
<b>Heating Source</b>	<b>Halogen Lamp-2</b>
<b>Temp.Sensors</b>	<b>PT100</b>
<b>Temp.Range</b>	<b>40°C-199°C</b>
<b>Temp.Step</b>	<b>1°C</b>
<b>Moisture Range</b>	<b>0.00%-100.00%</b>
<b>Moisture Readability</b>	<b>0.01%</b>
<b>Dry Range</b>	<b>100.00%-0.00%</b>
<b>Dry Readability</b>	<b>0.01%</b>
<b>Temp Setting</b>	<b>40°C-199°C By 1°C Step</b>
<b>Time Setting</b>	<b>1-99min By 10s</b>
<b>Number of Storage</b>	<b>20</b>
<b>Number of History</b>	<b>20</b>
<b>Heater</b>	<b>220V±15% 50HZ / 110V±15% 60HZ / 400W</b>
<b>Balance</b>	<b>Input: 220V 50HZ / 110V 60HZ Output:9V</b>