DW-EPP8 MultiChannel Pipette

MultiChannel Pipette Whole pipette is autoclavable at 121℃.The manifold can be freely rotated against the handle to work in a relaxed position,yet always at an optimum angle towards the microliter plate.The special nose cone geometry permits the use of most common pipette tips,and provides a firm, parallel fit.

Features

- Good design makes effortless tip ejection even easier.
- Fully autoclavable. (121℃ for 20 minutes)
- Enhanced UV resistance.
- Easy digital volume setting.
- Easy and convenient single hand locking lever.
- Eight sizes to cover a wide volume range. (0.1μL ~300ul)
- Tip ejector allows tip ejections without touching the tip. Tip ejector is made of plastic to avoid damaging glass tubes.

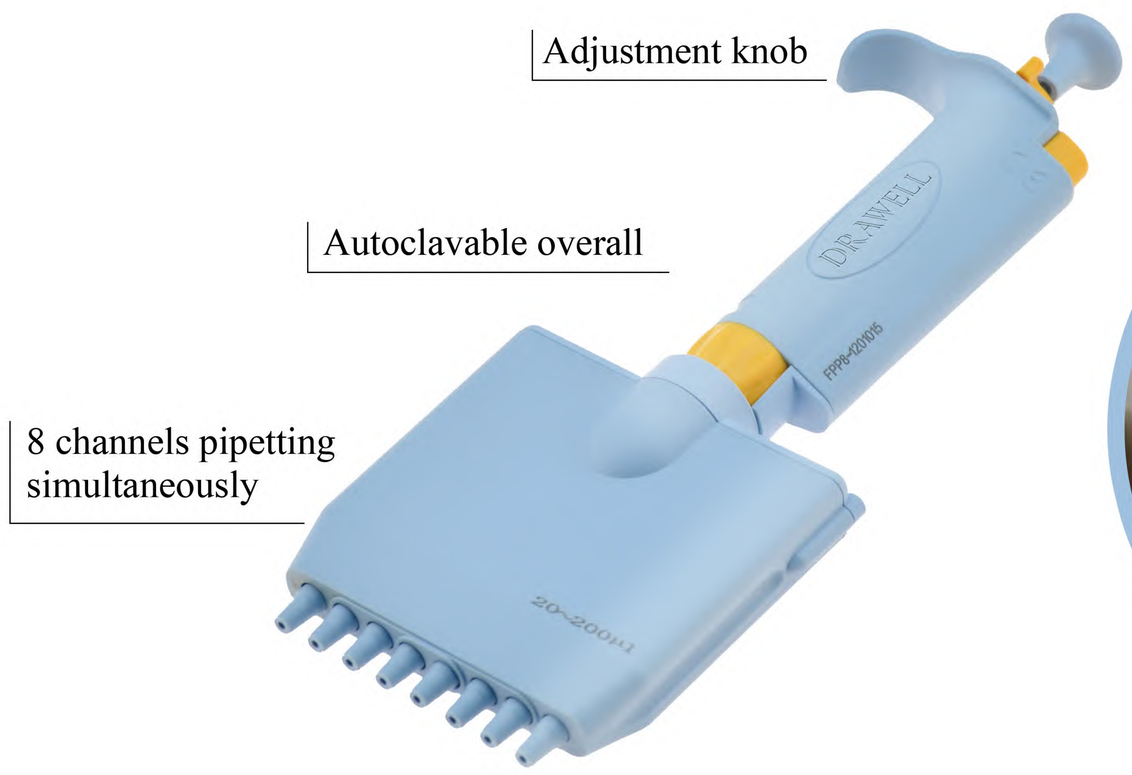

Specification

Model No.	Cat. No.	Volume (μL)	Increment (μL)	Rel. %	Abs μL	Rel. CV%	Abs SD μL
EPP8-10	1003010	1	0.02	3.5	0.012	1.20	0.012
		5	0.02	1.5	0.080	1.00	0.080
		10	0.02	1.0	0.100	0.80	0.100
EPP8-20	1003011	2	0.02	2.5	0.05	2.00	0.040
		10		1.5	0.15	0.50	0.050
		20		1.0	0.20	0.30	0.060
EPP8-50	1003012	5	0.02	2.5	0.125	1.5	0.075
		25		1.5	0.375	0.80	0.20
		50		1.0	0.50	0.50	0.25
EPP8-200	1003013	20	0.2	1.4	0.28	0.50	0.10
		100		1.0	1	0.4	0.4
		200		0.9	1.80	0.3	0.6
EPP8-300	1003014	30	0.2	3.5	1.05	1.00	0.30
		150		0.8	1.2	0.24	0.36
		300		0.8	2.4	0.15	0.45