

Gas Chromatograph Mass Spectrometer DW-GCMS-II

DW-GCMS-II is a cost-effective gas chromatograph mass spectrometer provided by Drawell. The products hold several patented technologies, and are widely used in industrial inspection, food hygiene, environmental protection, etc.



Brominated flame-retardant (BFR), volatile organic compounds (VOCs),

polycyclic aromatic hydrocarbons (PAHs), phthalate, etc.



Superior quality

it uses high-end core parts, which ensures DW-GCMS-II high quality.


Meeting high demands

provides necessity parts, and meets multiple requirements from different client.

User-friendly design

it facilitates easy operation and convenient maintenance.

High-efficiency ionization source

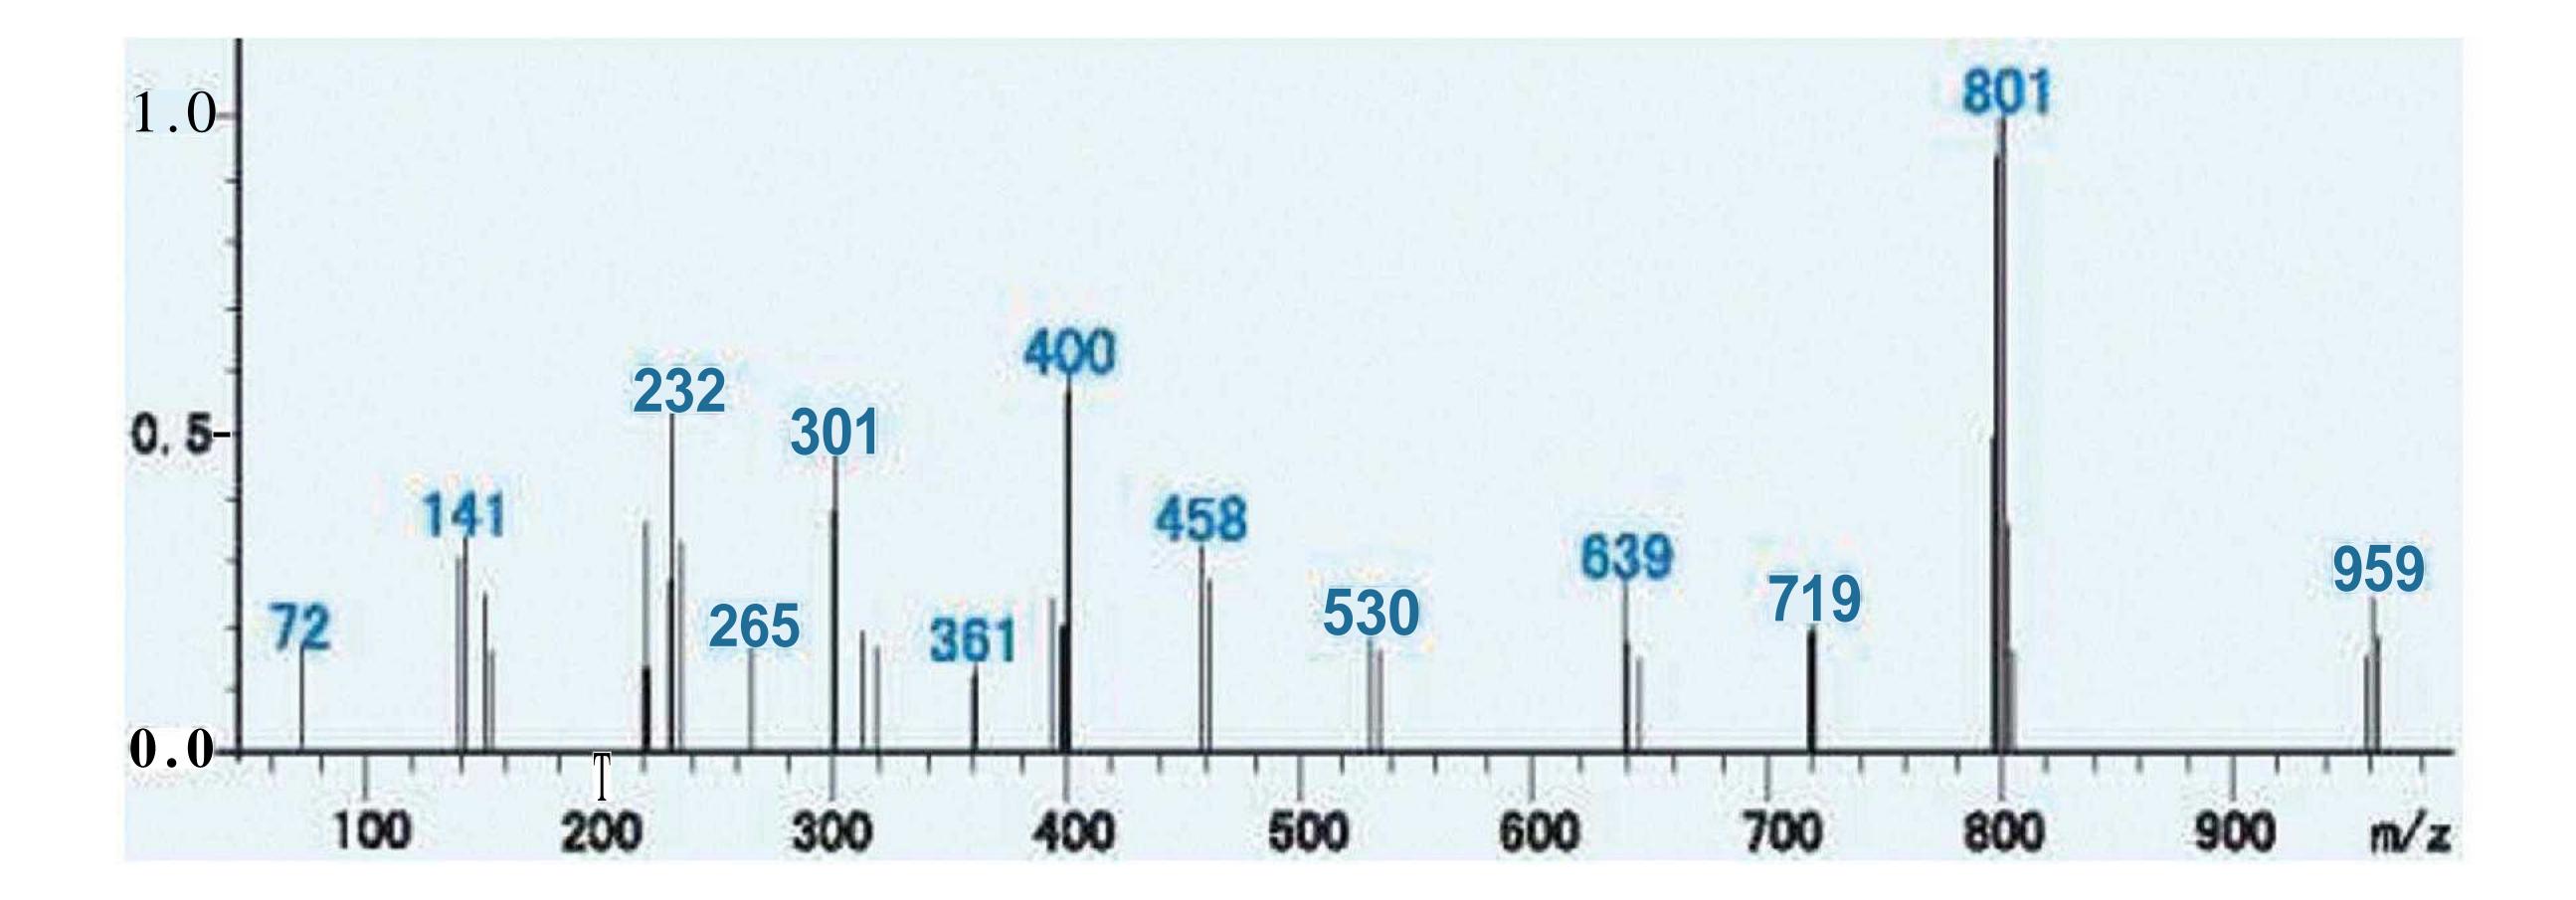

- modularization design, having high ionization efficiency, and enhancing sensitivity
- **ChemAnalyst software**

convenient operation, data acquisition and processing.

Highly cost-effective

offering more benefits while meeting all application demands.

Scientific solutions

Drawell offer customers perfectly customized solutions.

Consumables with favorable price



most consumables and parts are self-developed, which save a lot of maintenance cost, while providing high performance.

Satisfactory post-sale service

Drawell make a quick response to client's demands, with professional technicians offering 24-hour services.



Hardware

Electronic pressure/flow control system (EPC/EFC) for self-developed DW-GCMS-II system

Patented El filament set provides highly efficient electron emission, a maximum of 350u A

Quality mass analyzer with pre-filter reduces quadrupole pollution

Fligh-energy dynode electron multiplier ensures good sensitivity

Vacuum system with quality mechanical and turbo molecular pumps guarantees stability and reliability

Full scale gauges monitor vacuum states in real time

Self protection system guarantees safety of operators and core parts under abnormal conditions

RF power supply digital compensation technology ensures better sensitivity and resolution in full mass range

www.drawell.com.cn

DRAW ELL Artist of Science

Software

The software "ChemAnalyst" controls auto sampler (AS), gas chromatograph (GC) and mass spectrometer (MS); data are acquired and transferred by high-speed network card

Full Scan and selective Ion Monitoring (SIM) modes are available

The system supports manual and automatic tuning, display of total ion current (TIC) and mass chromatogram (MC) The data processing section searches target compounds in NIST 2011 based on mass spectra of samples, displays search results which

include retention times, structural formula and standard mass spectra, and compares the abundances of standard and real target ions.

Users can make accurate qualitative and quantitative analyses

Parameters

GC Specifications	
Inlet temperature	Max. 450°C
Pressure range	0~100psi,±0.002psi
Pressure control mode	Electronic pressure control (EPC), support CV and CC
Split mode	Split/splitless, max. split ratio: 1000:1
Column oven working temperature	Room temperature+4°C~450°C
Heating rate	Up to 120°C/min
Temperature programming	7 stages/ 8 platforms
Auto Sampler	Optional
N	IS Specifications
El source ionization energy	5W ~250, V (Adjustable)
Mass range	1.5~1000amu
Resolution	Unit resolution (full width at half maximum)
Ion source temperature	100 ~3500
Filament emission current	0-350 pA
GC-MS Interface temperature	Max. 450°C
Stability	±0.10 amu/48 hrs
Sensitivity	Full scan, 1 pg OFN at m/z 272 with S/N \geq 30:1 (RMS)
Scan rate	Up to l000amu/s
Vacuum	Turbo molecular pump(67L/s)
Detector	High energy dynode electron multiplier

